


Category 6 UTP Patchcord

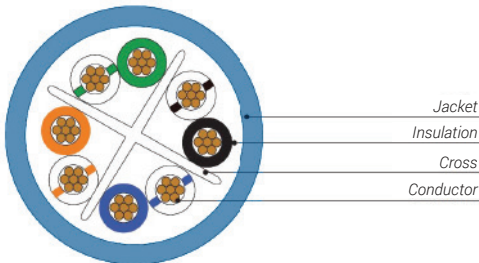

The electrical performance of patchcord exceeds TIA/EIA category 6 and ISO/IEC Class E specification and it is fully backward compatible with category 6, and 5 connectors. Improved anti-snag feature provides maximum protection from snagging during moves and rearrangements.

FEATURES

- 24 AWG stranded bare copper
- Good margin in test
- PVC sheath or LSZH sheath
- Universal TIA/EIA 568A or TIA/EIA 568B wire map
- Various lengths and colors

PHYSICAL SPECIFICATIONS

Parameters	Value
Contact material	Phosphor bronze
Contact plating	Gold 50 micro-inch; nickle 100 micro-inch
Insertion life	750 minimum
Operating temperature	14°F to 140°F (-20°C to 60°C)

ELECTRICAL SPECIFICATIONS

Parameters	Value
TIA/EIA category	6

ORDERING INFORMATION

Part No.	Length	Jacket Type	Flame
ANX-CAT6UTPPC = Annexcom Category 6 UTP Patchcord	01 = 1 meter	LS = LSZH	CM = CM
	02 = 2 meter	PV = PVC	CMR = CMR
	03 = 3 meter		
	05 = 5 meter		
	10 = 10 meter		
	xx = xx meter		
ANX-CAT6UTPPC	xx	yy	zzz