


Fiber Optic Pigtails

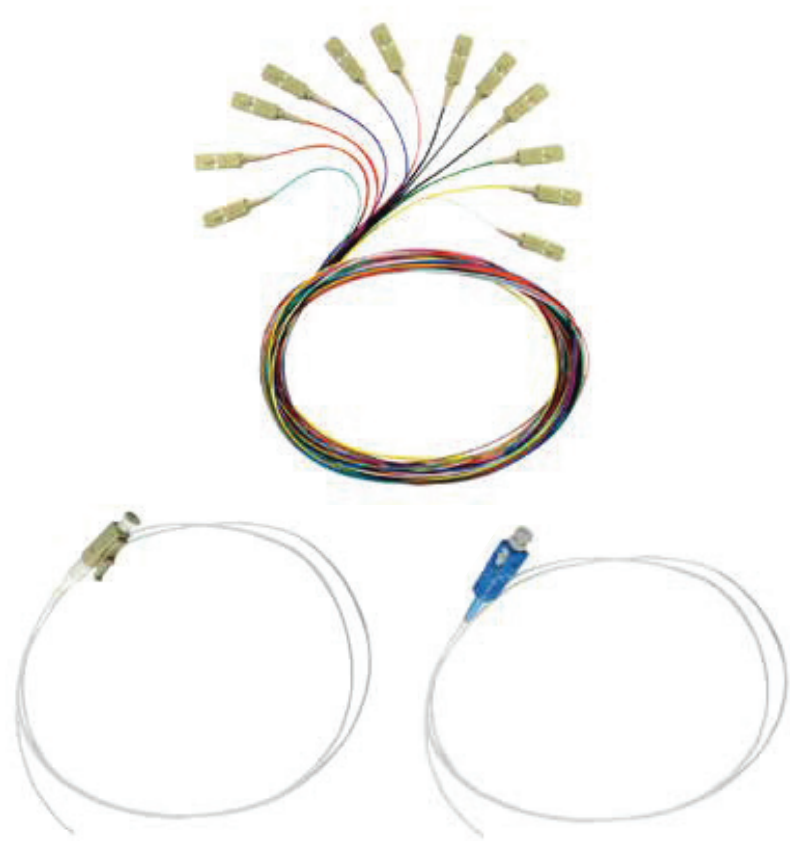

FEATURES

- Single Mode and Multi Mode connector SC, LC, FC, ST, MU, MTRJ
- Ultra Polished Connector (UPC) and Angle Polished Connector (APC)
- High quality zirconia ferrules
- Low insertion loss and high return loss
- Bend insensitive fiber for G657A/B
- Materials meets RoHS compliant
- Tested report provided for insertion loss and return loss for each assembly
- PVC, LSZH and FR cable jacket

TECHNICAL CHARACTERISTIC

Parameter	Description
Insertion Loss	≤ 0.2dB to ≤ 0.3dB
Return Loss	≥ 30dB to ≥ 60dB
Operating Wavelength	850nm, 1310nm, 1510nm
Exchangeability	≤ 0.2dB
Vibration	≤ 0.2dB
Operating Temperature	-40°C to +75°C
Storage Temperature	-42°C to +85°C

ORDERING INFORMATION

Part No.	Connector 1	Cable Length	Cable Diameter	Fiber Count	Fiber Type	Core Diameter
ANX = Annexcom	E2 = E2000	01 = 1 meter	09 = 0.9mm	SX = Simplex	SM = Single Mode	9 = 9µm
	FC = FC	15 = 1.5 meter	20 = 2.0mm	DZ = Dozen	OS1 / OS2	
	FCA = FC/APC		30 = 3.0mm			
	LC = LC				MM = Multi Mode	3 = OM3
	LCA = LC/APC				OM1 / OM2 / OM3	4 = OM4
	MTRJ = MTRJ				OM4 / OM5	5 = 50µm
	MU = MU					6 = 62.5µm
	SC = SC					7 = OM5
	SCA = SC/APC					
	ST = ST					
ANX	aa	cc	dd	xx	yy	z