


Fiber Distribution Box (FDB) 48 Ports



Closed view

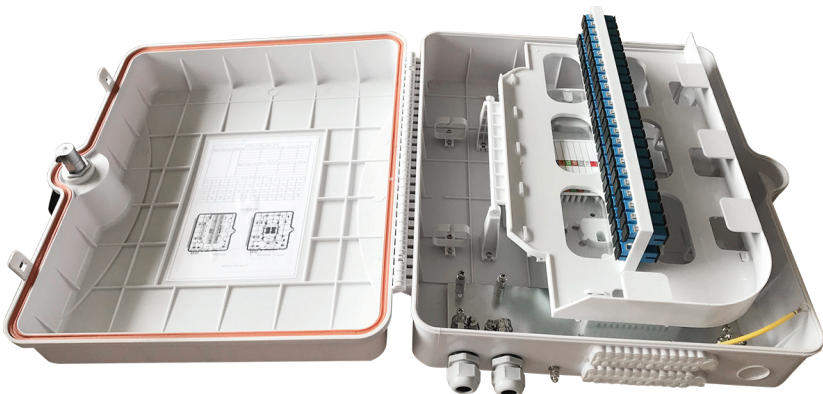

Open view

FEATURES

- IP 65 Rating for external use
- Lockable door for added security
- Integrated cable tie points for securing incoming cable
- Up to 12 splice & SC connection points
- Removable splice tray for easy installation
- Accepts loose tube, distribution and pre-terminated cables
- Integrated bend radius protection
- Sealing glands for up to 12 exiting cables + 2 incoming cable
- Removable door for ease of installation
- Supplied with 12 heatshrink splice protectors
- Supplied with transit tubing
- Supplied with wall fixings and tie wraps
- RoHS, REACH & SvHC compliant

APPLICATIONS

- Data centers, premise installations, telecommunication networks
- Ethernet, Fiber Channel, ATM, LAN, MAN and WAN
- Data communication and telecommunication networks
- Indoor/outdoor applications

TECHNICAL CHARACTERISTIC

Parameters	Value
Height	380mm
Width	356mm
Depth	141mm
IP Rating	P65
Suitable Adapter Type	SC Simplex or LC Duplex
Number of Exit Ports	48
Number of Cable Entry	8 Cores
Material	96 Splices
Operating temperature	PC+ABS
Color	White
Net Weight	-40°C to +60°C
Compliant to	RoHS, REACH/SvHC

ORDERING INFORMATION

Part No.	Description
ANX-FDB24	IP65 Indoor & Outdoor Fiber Distribution Box (FDB) 48 Ports