




Fiber Distribution Box (FDB) 4 Ports

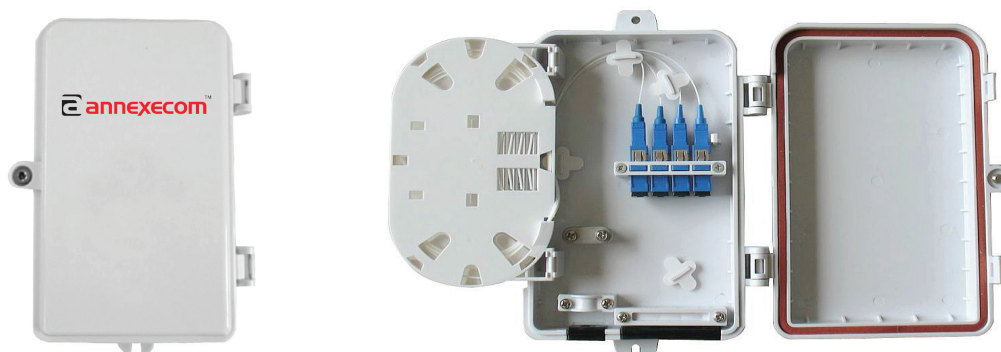

FEATURES

- 4-ports FDB is suitable for FTTH, optical fiber splitting/splicing using
- ABS plastic, light weight
- Reasonable design for fiber arrangement, bend radius more than 30mm
- Suitable for 1pc 4-way splitter or 1 pc 8-way splitter with LC connector (Steel tube type)

TECHNICAL CHARACTERISTIC

Parameter	Value
Operating temperature	-5°C to +40°C
Relative humidity	≤90% (+30°C)
Atmospheric pressure	70Kpa-106Kpa
Storage temperature	-40°C to +70°C
Optical parameter	2U (88.9mm)
Insertion loss	≤0.3dB
Excess loss	≤0.2dB
Return loss	≥50dB
IP standard	IP66

ACCESSORY LIST

Item	Part name	Description	Unit	Qty	Remark
1	Fiber optic terminal box	ANX-FDB04	set	1	Wall mounted accessory is standard. Pole mounted accessory is optional.
2	PLC splitter	PLC-1X4SC PLC-1X8LC	set	1	Optional
3	Fiber optic adapter	SC/PC	set	4	Optional
4	Pole mounted	LC/PC/DX	set	1	Optional

PACKAGING

Item	Size(CM)	Unit	Qty	Weight(KG)
1	14 (W) X 21 (H) X 4 (D)	PCS	1	0.6

ORDERING INFORMATION

Part No.	Description
ANX-FDB24	IP65 Indoor & Outdoor Fiber Distribution Box (FDB) 4 Ports